

Description: MBIL S 2000W


## Performance Data

Rated Light Output (Lumens @ 100 hours)	215000
Lamp Lumens per Watt (100hrs)	100
Rated Life (Hrs @ 10Hr./Start)	6000
Correlated Colour Temperature (K)	5200
Chromaticity (CIE - X Y)	340,360
Colour Rendering Index (CRI) or (Ra)	65
Typical Warm Up Time (Minutes)	10
Typical Hot Restart Time (Minutes)	15
S/P (Multiplier)	2.1
Energy Rating (ErP)	A+ 2200 kWh/1000h




## Physical Data

Base Designation	Special-Contact
Bulb Designation	T25
Bulb Diameter (mm)	25
Max. Overall Length (mm)	311
Effective Arc Length (mm)	188
Max. Base Temperature (°C)	350
Max. Bulb Temperature (°C)	850
Socket Pulse Rating (KV)	6
Mercury Content (mg)	87.0

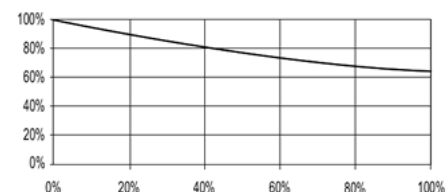

## Lamp Electrical Data

Nominal Lamp Wattage (W)	2150
Lamp Operating Voltage (V)	230
Lamp Operating Current (A)	10.3
Min. Open Circuit Voltage (RMS)	342
Min. Starting Pulse (Peak V)	4000-6000
Min. Pulse Width (Microseconds)	1.3 @3600V
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

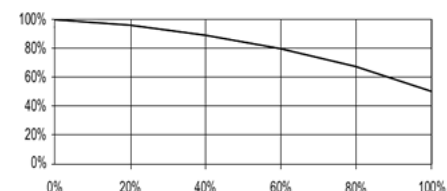

### Venture Lighting Australia

110 Lewis Road Wantirna South VIC 3152

Phone: +61 3 9800 5600 | Fax: +61 3 9800 5533

sales@venturelighting.com.au | venturelighting.com.au

Revision Date: 14 08 2020