

Plusrite®

LED PANDORA PLUS FLOOD LIGHT



IP65

RoHS
COMPLIANT

CE NOM



SAA
APPROVALS




Key Features

Applications


• Sports stadiums • Airport Apron

- Excellent thermal design; Reducing Heat and extending life of LED chips.
- Protective UV stabilized powder coated finish.
- Long life, Unique design, Black housing colour.
- IP65 Rated for outdoor use with 5 year warranty.
- Lumileds/Osram/Cree LED chips with high efficiency.
- Meanwell drivers are built in, but can be separate by request.
- 415V as optional. 0-10V or DALI dimmable as optional.


Model.	LED CHIPS (Optional)	Module Qty pcs	LED Qty pcs (Per-module / total)	Driver/ Meanwell	Colour Temperature	Voltage (V)	Beam Angle (Optional)	Wattage (W)	Luminosity (lm)	CRI(Ra)	Warranty	IP RATING
MFL-400-PLUS	Lumileds/Osram/Cree	4	80/320	2x ELG-240	3K,4K,5K,6K	100~305V	D2 (20°x20°)	400W	72000lm	>80	5 years	IP65
MFL-600-PLUS	Lumileds/Osram/Cree	6	80/480	2x ELG-300	3K,4K,5K,6K	100~305V	D3 (30°x30°) D6 (60°x60°)	600W	105000lm	>80	5 years	IP65
MFL-800-PLUS	Lumileds/Osram/Cree	8	80/640	4x ELG-240	3K,4K,5K,6K	100~305V	Type I (30°x100°) Type II (50°x140°)	800W	145000lm	>80	5 years	IP65
MFL-1000-PLUS	Lumileds/Osram/Cree	10	80/800	4x ELG-300	3K,4K,5K,6K	100~305V	Type III (40°x140°) Type IV (30°x140°)	1000W	175000lm	>80	5 years	IP65
MFL-1200-PLUS	Lumileds/Osram/Cree	12	80/960	4x HLG-320	3K,4K,5K,6K	100~305V	Type V (140°x140°)	1200W	210000lm	>80	5 years	IP65

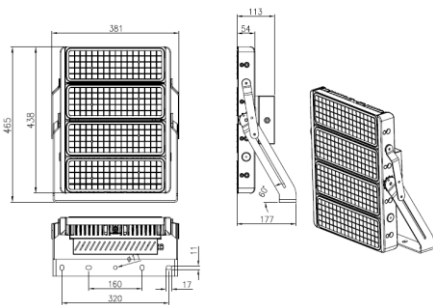


MFL-400-PLUS
Unit: MM

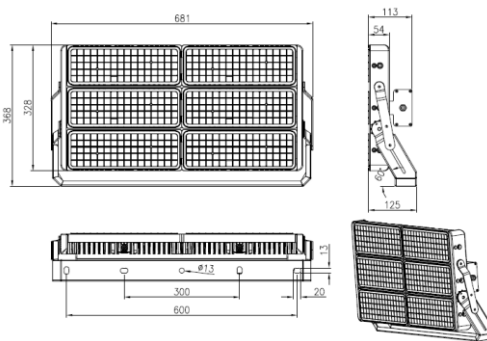


MFL-600-PLUS
Unit: MM

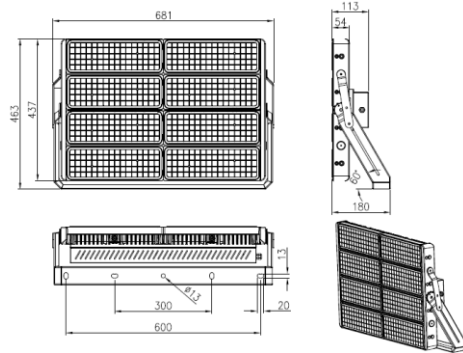

MFL-800-PLUS
Unit: MM

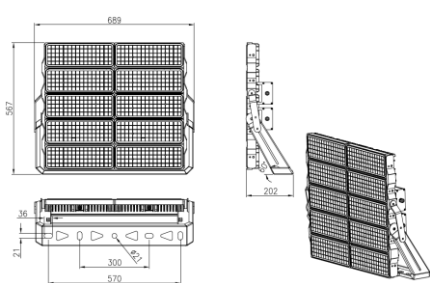

MFL-1000-PLUS
Unit: MM

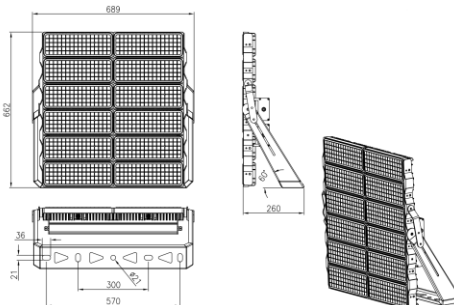

MFL-1200-PLUS
Unit: MM

PACKING DETAILS:

Product: **MFL-400-PLUS**

Net Weight: 12.50 kg
Outer ctn size: 740*330*175mm
Q'ty per ctn: 1 pc
G.W per ctn: 14.00 kg

Product: **MFL-600-PLUS**

Net Weight: 18.00 kg
Outer ctn size: 740*430*175mm
Q'ty per ctn: 1 pc
G.W per ctn: 20.00 kg

Product: **MFL-800-PLUS**

Net Weight: 23.00 kg
Outer ctn size: 765*610*180mm
Q'ty per ctn: 1 pc
G.W per ctn: 25.00 kg

Product: **MFL-1000-PLUS**

Net Weight: 29.00 kg
Outer ctn size: 780*730*190mm
Q'ty per ctn: 1 pc
G.W per ctn: 31.20 kg

Product: **MFL-1200-PLUS**

Net Weight: 35.00 kg
Outer ctn size: 780*835*210mm
Q'ty per ctn: 1 pc
G.W per ctn: 37.50 kg